

Holds and anchors when the heat is high.

Right performance. Right price.

Now there's an economy-grade tape that combines high temperature resistance with mechanical strength.


- Special combination of polyester film strengthened with glass filament scrim
- Pressure-sensitive acrylic adhesive for even, controlled unwind

3M™ Reinforced Filament Tape 2039

This economy tape is in a category of its own with its high strength and easy-to-use controlled unwind.

Performance properties:

- 3M-developed adhesive offers even, controlled unwind
- High tensile strength
- High dielectric strength for insulating
- Excellent adhesion and cohesive strength
- Excellent conformability
- Consistent thickness
- UL recognized Class F (155°C)
- Meets RoHS 2011/65/EU

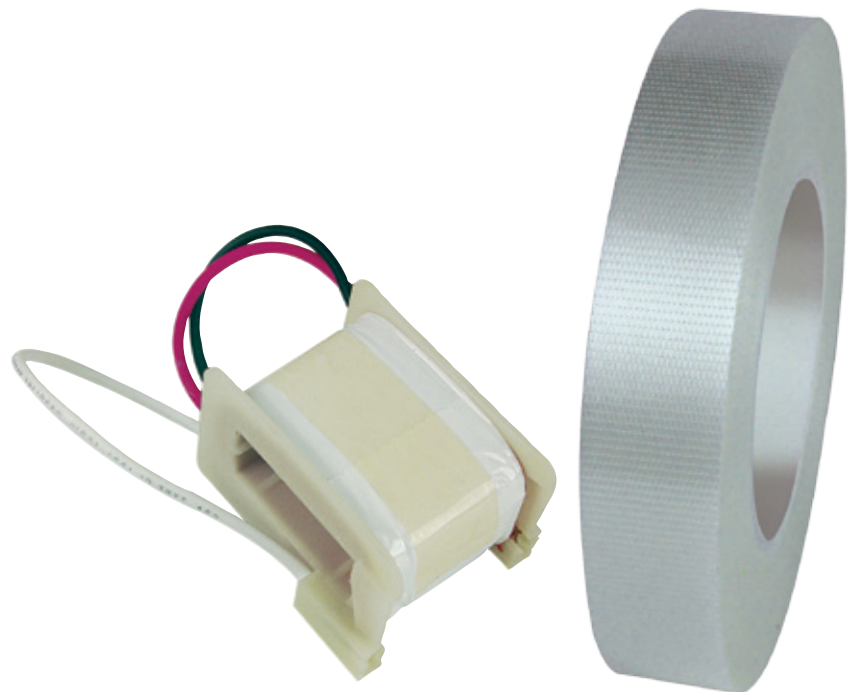

3M™ Reinforced Filament Tape 2039


This economy-grade electrical tape offers the right performance at the right price.

Versatility for multiple applications

- Good for holding down magnet wire, copper strips (sheets), and insulation materials in coil winding
- Helps provide permanent anchoring
- Effective for lead anchoring, banding of coils, and lead tape anchoring
- Can be used where tensile strength is particularly needed
- Designed for use in dry-type applications

Packaging

- Available in custom widths and lengths (standard length is 36 yards)
- 5-year shelf life from date of manufacture when stored in a humidity-controlled storage (50°F/10°C to 80°F/27°C and <75% relative humidity)

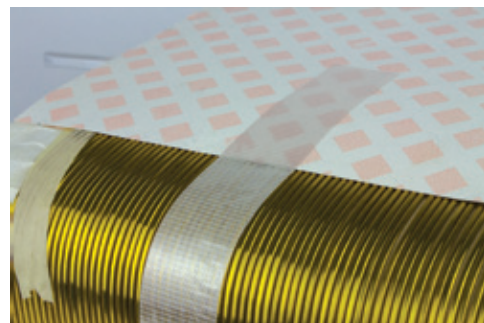

For more information, contact your local 3M electrical markets representative or a 3M authorized electrical products distributor.

Important Notice

Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use.

Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture at the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any direct, indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.**



Electrical Markets Division

6801 River Place Blvd.
Austin, TX 78726-9000
800 676 8381
FAX: 800 828 9329
www.3M.com/oem

© 3M 2017. All rights reserved. 3M is a trademark of 3M Company.
80-6016-0850-0 JM