
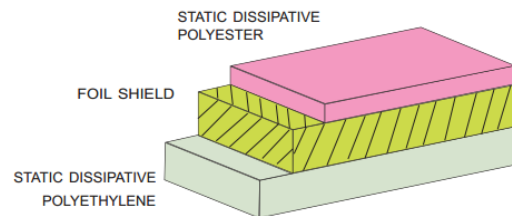


# Moisture Barrier Bag Dri-Shield 3400

This foil moisture barrier bag is designed to provide protection for ESD sensitive and moisture sensitive electronics, typically SMT (Surface Mount Technology) items. Best practice is to use with Desiccant and a Humidity Indicator Card. The bags are heat sealable and suitable for vacuum packaging. Bags are printed with ESD protective and moisture sensitive warning symbols, and a lot code for traceability.

SCS Moisture Barrier Bags Dri-Shield 3400 are manufactured from a laminate of polyester, foil, and polyethylene. The metal layer is intended to provide discharge shielding and to minimize the penetration of electric fields and electrostatic discharges.

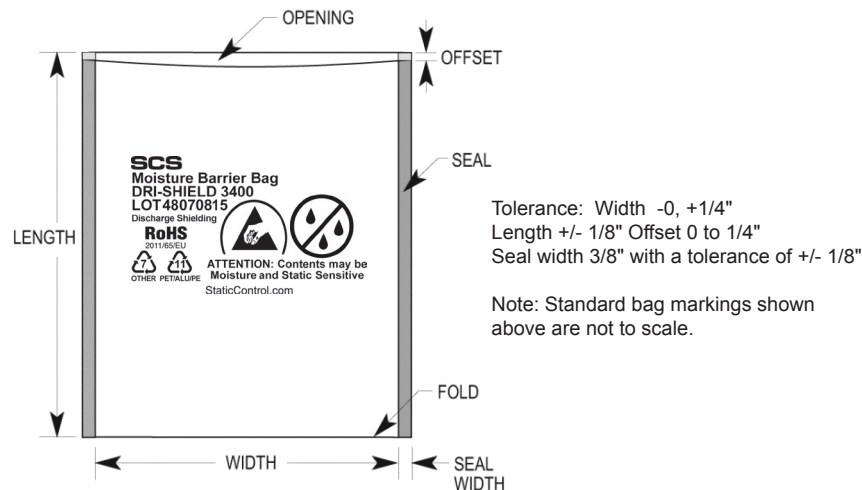

SCS Moisture Barrier Bags are packaged in a polyethylene bag.

## RoHS 2, REACH, and Conflict Minerals Statement

None of the RoHS 2 restricted materials or REACH substances of very high concern as of 2014/12/17, or Conflict Minerals are intentionally added in manufacturing this product. Ref: European Union Directive 2011/65/EU and Regulation (EC) No. 1907/2006/CE. See [SCS Warranty, Limitation of Liability and Remedies](#)

Meets ANSI/ESD S20.20, Packaging standard ANSI/ESD S541, and Static Control Bag ANSI/ESD S11.4 Level 1



| Physical                                | Typical Value                                      | Testing Method           |
|-----------------------------------------|----------------------------------------------------|--------------------------|
| Moisture Vapor Transmission Rate (MVTR) | ≤ 0.0003 grams/100 sq. in./24 hrs                  | ASTM F1249               |
| Tensile Strength                        | 6000 PSI, 41 MPa                                   | ASTM D882                |
| Puncture Resistance                     | 20 lbs, 88 N                                       | MIL-STD-3010 Method 2065 |
| Seal Strength                           | 15 lbs, 66 N                                       | ASTM D882                |
| Thickness                               | 4 mils, 0.1016 mm +/-10%                           | MIL-STD-3010 Method 1003 |
| Marking Adhesion                        | Pass                                               | IPC-TM-650 2.4.1         |
| Electrical                              | Typical Value                                      | Testing Method           |
| ESD Shielding                           | <10 nJ                                             | ANSI/ESD STM11.31        |
| Surface Resistance - Interior           | 1 x 10 <sup>4</sup> to < 1 x 10 <sup>11</sup> ohms | ANSI/ESD STM11.11        |
| Surface Resistance - Exterior           | 1 x 10 <sup>4</sup> to < 1 x 10 <sup>11</sup> ohms | ANSI/ESD STM11.11        |
| EMI Attenuation                         | 45 dB                                              | 1 to 10 GHz              |
| Cleanliness                             | Typical Value                                      | Testing Method           |
| Silicone                                | Not Detected                                       | FTIR                     |
| Heat Sealing Conditions                 | Typical Value                                      |                          |
| Temperature                             | 400°F, 204°C                                       |                          |
| Time                                    | 0.6 – 4.5 seconds                                  |                          |
| Pressure                                | 30 – 70 PSI, 206 – 482 KPa                         |                          |

Bag is free of amines, silicones and heavy metals.

This product is intended for commercial use only. This product is not on the Qualified Product Listing under the Defense Standardization Program.

**NOTE:** The complete dry package concept of packaging for electronics requires three elements:

[Moisture Barrier Bags](#) - To Protect

[Desiccants](#) - To Absorb Moisture

[Humidity Indicator Cards](#) - To Monitor Performance

Made in the United States of America with Globally Sourced Materials.

Specifications and procedures subject to change without notice.

## DRI-SHIELD 3400 MOISTURE BARRIER BAG

926 JR Industrial Drive, Sanford, NC 27332  
WEB SITE: [StaticControl.com](http://StaticControl.com)  
PHONE (919) 718-0000

**DRAWING  
NUMBER**  
Dri-Shield 3400

**DATE**  
July  
2015

**SCS**